

Product introduction

JISIM JD3110 is a 12.6W constant current LED intelligent dimmable driver specifically designed for small aperture luminaires. It supports deep dimming functions such as DALI-2 DT6/Push DIM. The customized dimming curve provides a more comfortable viewing experience for the human eye. When not connected to an external signal, it can be used as a non-dimmable driver and supports a gradual start-up effect. It is suitable for small aperture downlights, spotlights, linear lights. Paired with various intelligent control systems, it is widely used in smart homes, smart hotels, intelligent commercial spaces, smart offices, smart buildings, and other



Product Features

- Compact SELV independent dimmable driver
- Support DALI-2 DT6/Push DIM dimming
- Glue filling process, Global certification
- Suitable for Class I/II/III indoor light fixtures
- Smooth dimming, flicker-free, dimming range: 1-100%
- DIP switch for multi-current setting, Max. output power 12.6W
- Up to 50000 hours life time, 5-year warranty (Long-lasting Capacitor)
- Small size and light weight, High power factor, High efficiency, Low THD
- The housing is made from V0 flame retardant PC materials from CHIMEI
- Standby power consumption <0.5 W, meets ErP energy efficiency certification

Technical Specifications

(All parameters not specially mentioned are measured at 230VAC input, full load and 25°C of ambient temperature)

Model	JD3110			Output Type	Constant Current	
Input	DC Voltage Range	100-240V		Dimming Interface	DALI-2 DT6 Push DIM	
	AC Voltage Range	100-240V		Output Feature	Isolation	
	Rated Voltage	220Vac/230Vac/240Vac		IP Rating	IP20	
	Input Frequency	0/50/60Hz		Insulation Rating	Class II (Suitable for class I II III light fixtures)	
	Input Current	≤0.18A/110Vac(at full load) ≤0.07A/230Vac(at full load)		No Load Output Voltage	≤59Vdc	
	Input Power	Max.15W		Output Voltage Range	9-42Vdc	
	Power Factor	PF>0.9C/110Vac(at full load) PF>0.9C/230Vac(at full load)		Output Current Range	1.50-300mA	
	THD	THD<15%/230Vac(at full load)		Output Power Range	1.35-12.6W	
	Efficiency	≥85%(at full load)		Dimming Range	1~100%	
	Inrush Current	Cold start 15A(Test twidth=102us under 50% Ipeak@230Vac)		Ripple Current	<5%	
Anti-Surge	L-N:1KV		Current Accuracy	±5%		
Leakage Current	<0.5mA/230Vac		PWM Frequency	4000Hz		
Protection	Overload Protection	Hiccup Mode (Auto-Recovery after Elimination)		Working Temperature	ta:-20°C~60°C	
	Open Circuit Protection	≤59Vdc		Working Humidity	20~95%RH(No Condensation)	
	Short Circuit Protection	Hiccup Mode (Auto-Recovery after Elimination)		Storage Temperature/Humidity	-20~85°C/10~95%RH	
				Case Temperature	tc:75°C	
Safety & EMC	Withstand Voltage	I/P-O/P:3750Vac,5mA,60s, I/P-DIM/P:1500Vac,5mA,60s,O/P-DIM/P:1500Vac,5mA,60s			Life Time	>50000h@tc=75°C
	Insulation Resistance	I/P-O/P:100MΩ/500VDC/25°C/70%RH				
	Safety Standards	CCC	China	GB19510.1, GB19510.14		
		CE	European Union	EN61347-1, EN61347-2-13, EN62493		
		KC	Korea	KC61347-1, KC61347-2-13		
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493		
		ENEC	Europe	EN61347-1, EN61347-2-13, EN IEC62384		
		CB	CB Member States	IEC61347-1, IEC61347-2-13		
		RCM	Australia	AS/NZS61347.1, AS61347.2.13		
		BIS	India	IS15885(PART2/SEC13)		
	EMC Emission	EAC	Russia	IEC61347-1, IEC61347-2-13		
		UKCA	United Kingdom	BS EN61347-1, BS EN IEC61347-2-13, BS EN62493		
		CCC	China	GB/T17743, GB17625.1		
		CE	European Union	EN IEC55015, EN IEC61000-3-2, EN61000-3-3		
		KC	Korea	KSC9815, KSC9547		
RCM		Australia	EN IEC55015, EN IEC61000-3-2, EN61000-3-3			
UKCA		United Kingdom	BS EN IEC55015, BS EN IEC6100-3-2, BS EN61000-3-3			
EMC Immunity	EN61000-4-2,3,4,5,6,8,11,EN61547					
ErP	Power Consumption	Standby Power Consumption	<1.3W (PWM Off)			
	Flicker/ Stroboscopic Effect	IEEE1789	Meet IEEE Std1789-2015			
		CIESVM	Pst≤1, SVM≤0.4			
DF	Phase Factor	DF≥0.9				
Test Equipment	AC Source	PS-61005	Withstand Voltage Tester	TH9302D	Other	
	DC Electronic Load	IT8512A+	Thermostatic Humidity Chamber	HT-H-802		
	Spectrum Analyzer	KH3932	Intelligent Electrical Parameter Meter	PF9800	LED Load	
	Surge Generator	SUG61005TB(7.5KV)-2216	Oscilloscope	TBS1102B		
	Stroboscope	LANSHU-201B	Digital Wattmeter	PM2818C		

DALI-2 DT6 Push DIM Dimmable LED Driver

LED Current Settings


Number	Output				Switch Position	
	Current (mA)	Voltage (VDC)	NO Load Output Voltage (VDC)	Power (W)	1	2
*1	150	9-42	59	6.3	/	/
2	200	9-42		8.4	ON	/
3	250	9-42		10.5	/	ON
4	300	9-42		12.6	ON	ON

* Factory default.

- ◀ 1. Please disconnect the AC input before adjusting the output current via the DIP switch, If not, it may damage the lighting fixture.
- ◀ 2. No Overload, The output power should be less than or equal to 12.6W.


2D Diagram

Length (L)	Width (D)	Height (H)	Weight (W)
115mm	40mm	28mm	106.3±10g

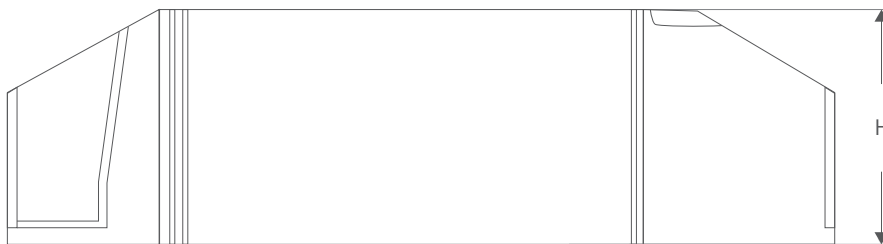

Wiring Diagram

PushDim Application Wiring Diagram

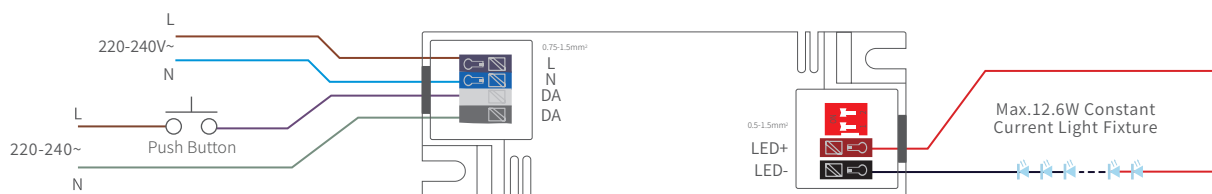

◦ Push function ◦

Long press: Adjust brightness, short press: Turn on/off.

DALI-2 DT6 Push DIM Dimmable LED Driver

DALI Application Wiring Diagram



Remark

- ▶ The two DALI control lines polarity-reversible.
- ▶ Default setting brightness is 100%.
- ▶ The default is logarithmic dimming curve.
- ▶ Max.64 DALI drivers per DALI control line.
- ▶ The current consumption of the DALI interface is less than 2mA.
- ▶ The maximum distance length of the DALI control line is 200m at 2x1.0mm.
- ▶ DALI bus can be wired together with any mains voltage cables, but separate wiring is recommended.
- ▶ Max. 64 DALI drivers per DALI control line. DALI protocol includes Max.16 scene groups and 16 scenes.
- ▶ The configuration parameters of the driver can be set through the DALI configuration tool or DALI application controller during installation, such as setting device address, group address, power-on level, bus-failure level, scene level, fade time, dimming curve, etc.


Installation Instructions

Interface	Marking	Description	wire cross Section	wire Stripping Length
Input	N	Input terminal of AC neutral wire	0.75...1.5mm²(16-18AWG)	5...6mm
	L	Input terminal of AC live wire	0.75...1.5mm²(16-18AWG)	5...6mm
Output	LED-	Negative electrode output of the driver	0.5...1.5mm²(16-20AWG)	5...6mm
	LED+	Positive electrode output of the driver	0.5...1.5mm²(16-20AWG)	5...6mm
Signal	DA	Negative electrode input 0-10V/PWM/RX dimming	0.75...1.5mm²(16-18AWG)	5...6mm
	DA	Positive electrode input 0-10V/PWM/RX dimming	0.75...1.5mm²(16-18AWG)	5...6mm


Connection instructions

1. All connections must be as short as possible to ensure good EMI performance.
2. No secondary switches are allowed.
3. The driver output does not support hot swap
4. Incorrect wiring can damage the LED.
5. The power cable should be kept at a certain distance from the driver and other connecting cables (5-10cm recommended)

Installation Precautions

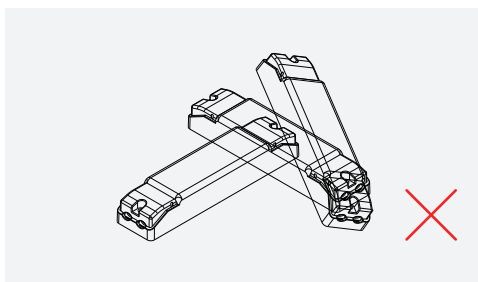


Do not stack the products. The distance between adjacent products should be more than 5 cm to avoid affecting the heat dissipation and service life of the products.

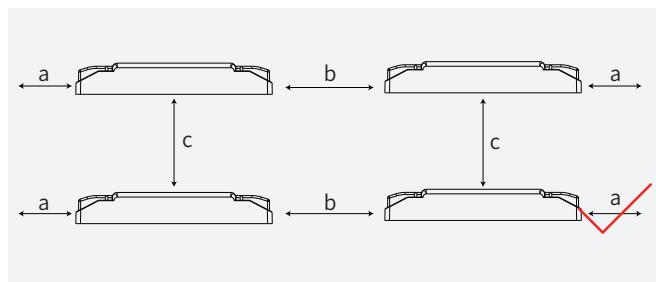

dimensions for safe installation should be: a>5cm; b>5cm; c>5cm


Product Characteristic Curves

Life Time VS Tcase

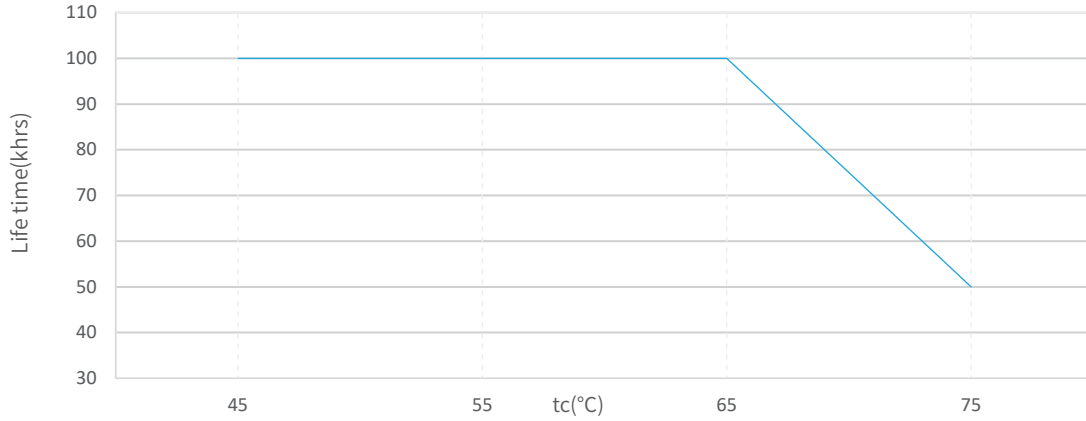


The life-time of the LED driver is shown in the figure above calculated (based on the 75% survival rate). The relation of tc to ta temperature depends also on the luminaire design.

Operating Window

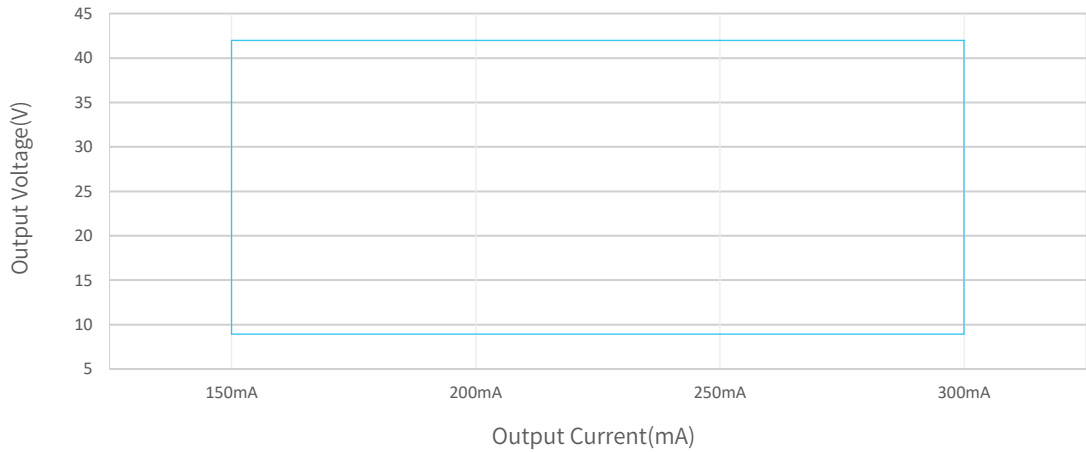


Power Factor VS @Load 230Vac

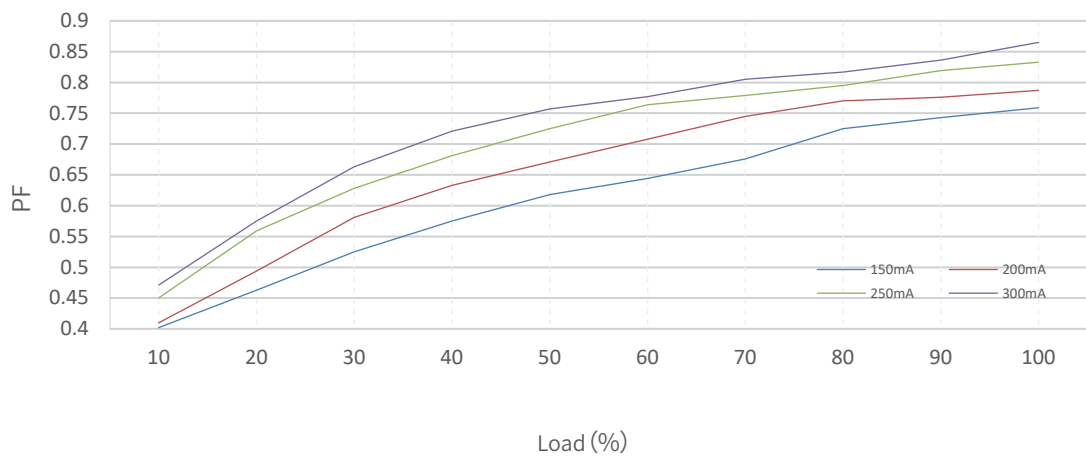


DALI-2 DT6 Push DIM Dimmable LED Driver

THD VS @Load 230Vac

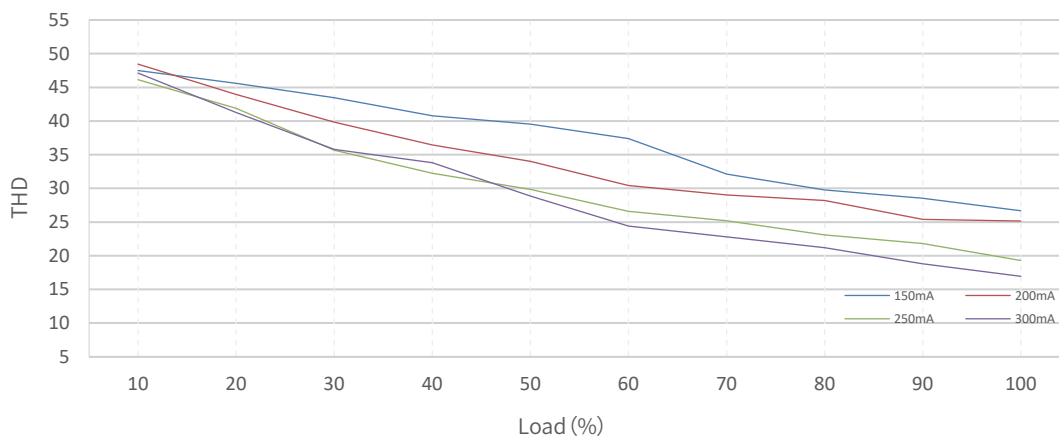

Efficiency VS Load@230Vac

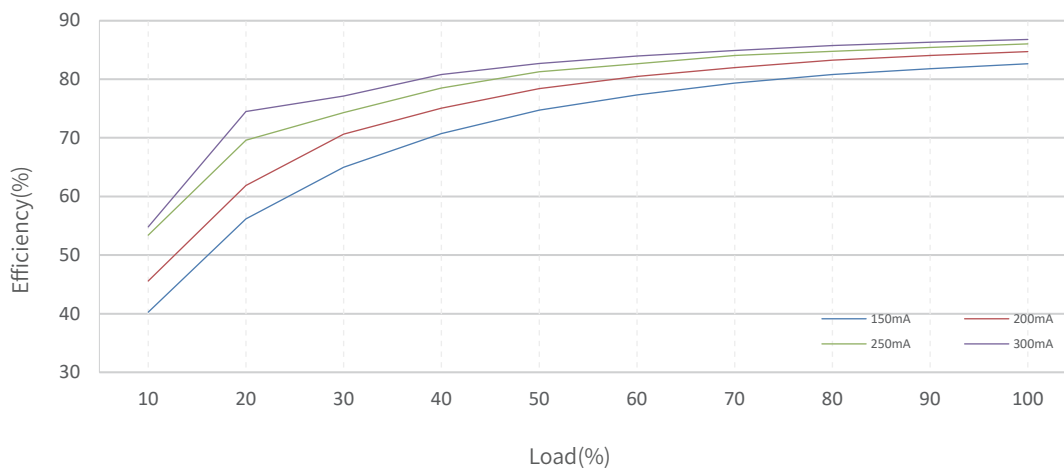

Packaging Image



DALI-2 DT6 Push Dimmable LED Driver

Packaging Size

Packaging Details	Carton Size	Packing Units	Weight
Inner Packaging Box	125 x 47 x 33mm	1pcs	120±10g
Small Carton Packaging	350 x 197 x 167mm	40pcs	5.1kg
Large Carton Packaging	420 x 360 x 365mm	160pcs	21.3kg

Packaging instructions:

Each large carton packaging contains 4 small carton packagings, Each small carton packaging contains 40 inner packaging boxes.

Cautions

- ▶ This product is used as a component in conjunction with a lighting fixture. Due to the influence of EMC from the lighting fixture and wiring, customers should perform EMC testing to confirm the entire product set.
- ▶ No operation with power on. Installation and debugging should be performed by qualified professionals. Please read the product manual carefully before installation.
- ▶ This product can only be used outside the light body, Cannot be used inside of the light, and it must be used within the specified working environment.
- ▶ This product is not waterproof and should be avoided from direct sunlight and rain. If it is installed outdoors, please use a waterproof case.
- ▶ Good heat dissipation conditions are beneficial to the product's lifetime. Please install the product in a suitable environment, and strictly prohibit using double-sided tape to attach the casing or circuit board.
- ▶ Please check the parameters of the LED driver to ensure they meet the application requirements of the lighting fixture.
- ▶ Please install according to the standard wire gauge specified in the manual to avoid malfunctions caused by inappropriate wiring.
- ▶ Before powering on, please ensure that the wiring is correct to prevent damage to the driver or lighting fixture caused by incorrect wiring.
- ▶ If a malfunction occurs, please do not attempt to repair it yourself, if you have any questions, please contact the manufacturer.
- ▶ The manual is for reference only. Please refer to the actual product. Any changes to this product will not be notified separately.
- ▶ For more information, please send an email to fei.l@jisim-tech.com.

Warranty Terms

- ▶ The product is warranted for 5 years. (The life and MTBF of the product are for reference only, and do not represent a warranty statement.)
- ▶ During the warranty period, if any quality issues arise, JISIM will provide free repair or replacement services.

Non-Warranty Terms

The following situations are not covered by the free warranty or replacement service:

- ▶ The warranty period has expired.
- ▶ Damage caused by human factors such as overvoltage, overload, or improper operation.
- ▶ Deformation or damage to the exterior appearance.
- ▶ Damage caused by natural disasters or other irresistible human factors.
- ▶ The warranty label has been torn off or removed.
- ▶ No contract or invoice proof is provided.



Notice:

1. Repair or replacement provided is the only remedy for customers. JISIM is not liable for any incidental or consequential damage unless it is within the law.
2. JISIM has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.



WARNING:

1. FELV terminals marked "Risk of electric shock" are not safe to touch.
2. Circuits connected to any FELV control terminal shall be insulated for the LV supply voltage of the control gear and any terminals connected to the FELV circuit shall be protected against accidental contact.