

Product introduction

JISIM JD5229C is a constant voltage LED intelligent dimming driver. It is a product specially designed for indoor constant voltage lamps. it supports deep dimming functions such as Bluetooth tunable white dimming. The customized dimming curve section makes the human eye more comfortable; when no external signal is connected, it can be used as a non-dimming driver; It is suitable for LED strips, linear lamps, lamp films, magnetic lamps, decorative lamps. It is widely used in smart homes, smart hotels, smart commercial lighting, smart offices, smart buildings, large public buildings, etc. Places.



Product Features

- Compact SELV independent dimmable driver
- Support Bluetooth tunable white dimming
- Globally certified,SELV equivalent
- Suitable for class I II III luminaires
- Output power up to 75W
- Up to 50000 hours life time,5-Year Warranty(Long-lasting Capacitor)
- Smooth dimming, no stroboscopic, no noise, dimming range:0.1-100%
- Small size and light weight,High power factor,High Efficiency,Low THD
- The housing is made from Vo flame retardant PC materials from CHIMEI
- Standby power consumption <0.5 W,meets ErP energy efficiency certification

CASAMBI

Technical Specifications





(All parameters not specially mentioned are measured at 230VAC input, full load and 25°C of ambient temperature)

Model	JD5129C			Features	Output Type	constant voltage
Input	DC Voltage Range	220-240V			Communication mode	Bluetooth
	AC Voltage Range	220-240V			Output Feature	Isolation
	Rated Voltage	220Vac/230Vac/240Vac			IP Rating	IP20
	Input Frequency	0/50/60Hz		Insulation Rating	Class II (Suitable for class I II III light fixtures)	
	Input Current	≤0.45A/230Vac(at full load)		No Load Output Voltage	≤49Vdc	
	Input Power	Max.84W		Rated Voltage	48Vdc	
	Power Factor	PF>0.95C/230Vac(at full load)		Output Current Range	Max.1.6A	
	THD	THD<8%/230Vac(at full load)		Output Power Range	75W	
	Efficiency	≥90%(at full load)		Dimming Range	0.1~100%	
	Inrush Current	Cold start 15A(Test twidth=102us under 50% Ipeak@230Vac)		Ripple	Max.480mV	
Anti-Surge	L-N:1KV		Voltage Accuracy	±5%		
Leakage Current	<0.5mA/230Vac		PWM Frequency	16000Hz		
Protection	Overload Protection	Hiccup Mode (Auto-Recovery after Elimination)		Environment	Working Temperature	ta:-20°C~60°C
	Open Circuit Protection	≤49Vdc			Working Humidity	20~95%RH(No Condensation)
	Short Circuit Protection	Hiccup Mode (Auto-Recovery after Elimination)			Storage Temperature/Humidity	-20~85°C/10~95%RH
					Case Temperature	tc:90°C
Safety & EMC	Withstand Voltage	I/P-O/P:3750Vac, 5mA,60s				
	Insulation Resistance	I/P-O/P:100MQ/500VDC/25°C/70%RH				
	Safety Standards	CCC	China	GB19510.1, GB19510.14		
		CE	European Union	EN61347-1, EN61347-2-13, EN62493		
		KC	Korea	KC61347-1, KC61347-2-13		
		TUV	Germany	EN61347-1, EN61347-2-13, EN62493		
		ENEC	Europe	EN61347-1, EN61347-2-13, EN IEC62384		
		CB	CB Member States	IEC61347-1, IEC61347-2-13		
		RCM	Australia	AS/NZS61347.1, AS61347.2.13		
		BIS	India	IS15885(PART2/SEC13)		
		EAC	Russia	IEC61347-1, IEC61347-2-13		
	UKCA	United Kingdom	BS EN61347-1, BS EN IEC61347-2-13, BS EN62493			
	EMC Emission	CCC	China	GB/T17743, GB17625.1		
		CE	European Union	EN IEC55015, EN IEC61000-3-2, EN61000-3-3		
		KC	Korea	KSC9815, KSC9547		
		RCM	Australia	EN IEC55015, EN IEC61000-3-2, EN61000-3-3		
		UKCA	United Kingdom	BS EN IEC55015, BS EN IEC6100-3-2, BS EN61000-3-3		
		EAC	Russia	IEC62493.IEC61547, EN55015.IEC61000-3-2, IEC61000-3-3		
	BIS	India	IS15885(PART2/SEC13)			
EMC Immunity	EN61000-4-2,3,4,5,6,8,11,EN61547					
ErP	Power Consumption	Stanby Power Consumption		<0.5W (PWM Off)		
	Flicker/ Stroboscopic Effect	IEEE1789		Meet IEEE Std1789-2015		
		CIESVM		Pst≤1, SVM≤0.4		
Test Equipment	DF	Phase Factor		DF≥0.9		
		AC Source		PS-61005	Withstand Voltage Tester	TH9302D
		DC Electronic Load		IT8512A+	Thermostatic Humidity Chamber	HT-H-802
		Spectrum Analyzer		KH3932	Ntelligent Electrical Parameter Meter	PF9800
		Surge Generator		SUG61005TB(7.5KV)-2216	Oscilloscope	TBS1102B
		Stroboscope		LANSHU-201B	Digital Wattmeter	PM2818C
				Other		
				LED Load		

Bluetooth Tunable White Dimmable LED Driver

2D Diagram >>>----->>>

Length (L)	Width (D)	Heigh(H)	Weight(W)
265mm	42mm	30mm	255.2±10g

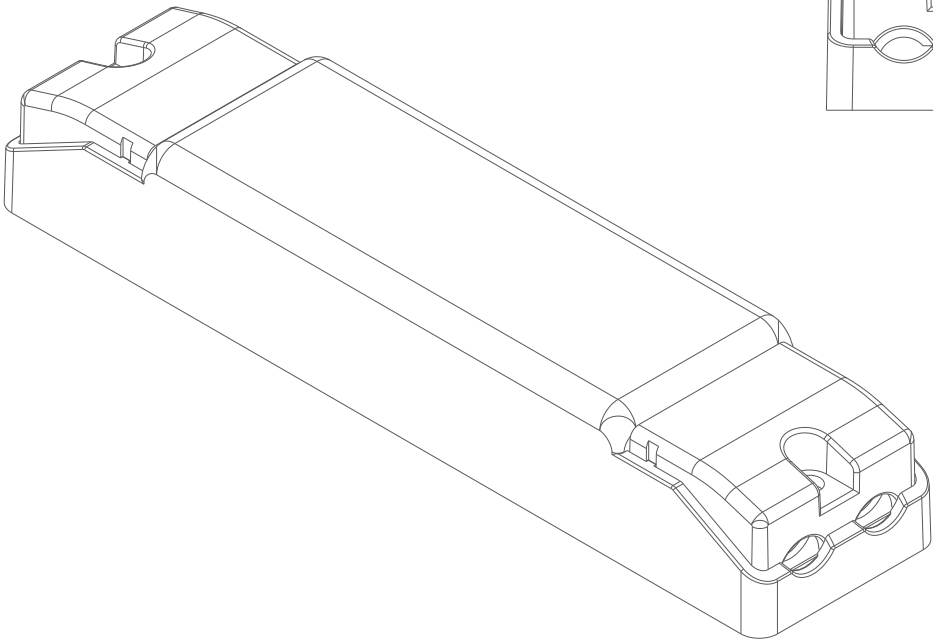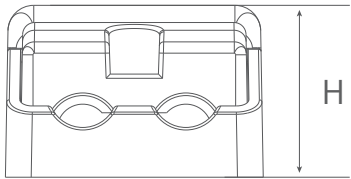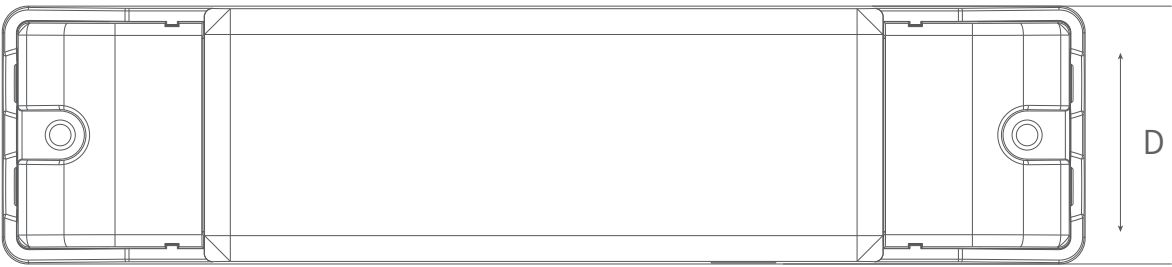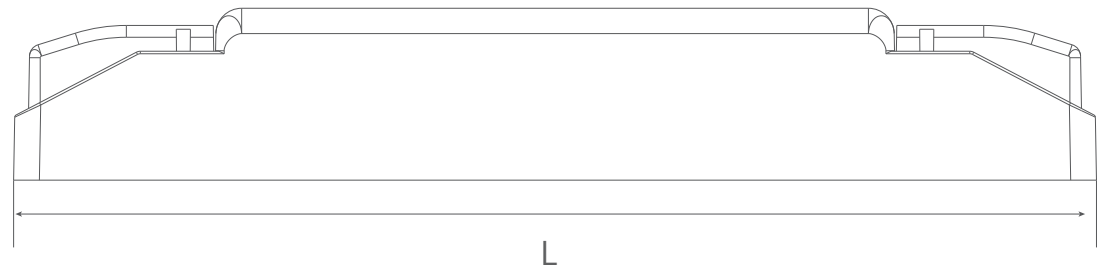

Bluetooth Tunable White Dimmable LED Driver

Wiring Diagram




Installation Instructions

Interface	Marking	Description	Wire cross section	Wire Stripping length
Input	N	Input terminal of AC neutral wire	0.75...1.5mm²(16-18AWG)	5...6mm
	L	Input terminal of AC live wire	0.75...1.5mm²(16-18AWG)	5...6mm
Output	LED+	Positive electrode output of the driver	0.75...2.5mm²(14-18AWG)	5...6mm
	LED-W	Negative electrode output of warm light	0.75...2.5mm²(14-18AWG)	5...6mm
	LED-C	Negative electrode output of cold light	0.75...2.5mm²(14-18AWG)	5...6mm

Connection instructions

1. Rated torque: M2.6, 0.35~0.40N.m
2. All connections must be as short as possible to ensure good EMI performance.
3. Driver output support hot swap.
4. Incorrect wiring can damage the LED.
5. The power cable should be kept at a certain distance from the driver and other connecting cables (5-10cm recommended)

Product Characteristic Curves

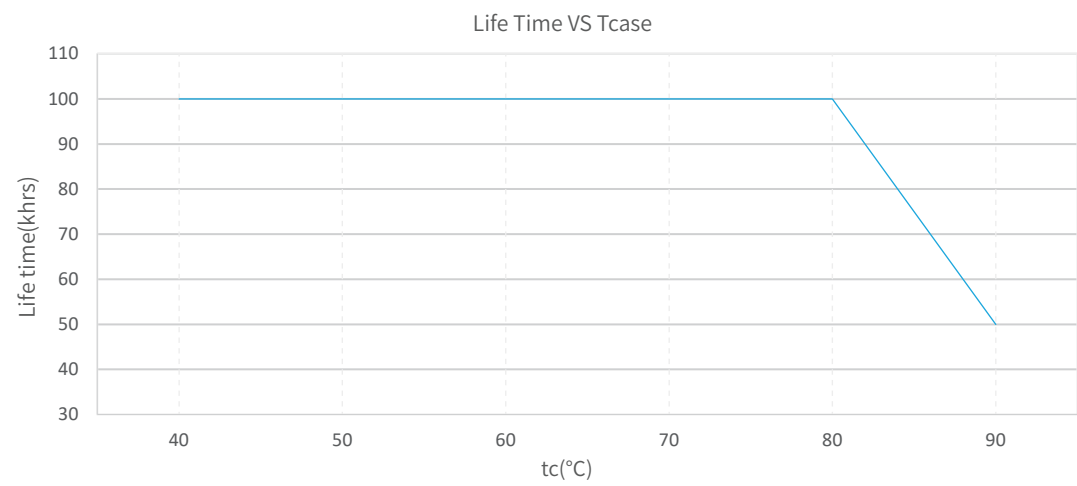

The life-time of the LED driver is shown in the figure above calculated (based on the 90% survival rate).
The relation of tc to ta temperature depends also on the luminaire design.

Bluetooth Tunable White Dimmable LED Driver

Packaging Image



▲ Inner Packaging Box



◀ Large Carton Packaging



◀ Small Carton Packaging

Packaging Size

Packaging Details	Carton Size	Packing Units	Weight
Inner Packaging Box	269x 47 x 34mm	1pcs	284.5±10g
Small Carton Packaging	350 x 197 x 167mm	15pcs	4.57kg
Large Carton Packaging	420 x 360 x 365mm	60pcs	19.17kg

Packaging instructions:
Each large carton packaging contains 4 small carton packagings,Each small carton packaging contains 15 inner packaging boxes.

Bluetooth Tunable White Dimmable LED Driver

Cautions

- This product is used as a component in conjunction with a lighting fixture. Due to the influence of EMC from the lighting fixture and wiring, customers should perform EMC testing to confirm the entire product set.
- No operation with power on. Installation and debugging should be performed by qualified professionals. Please read the product manual carefully before installation.
- This product can only be used outside the light body, cannot be used inside the light, and it must be used within the specified working environment.
- This product is not waterproof and should be avoided from direct sunlight and rain. If it is installed outdoors, please use a waterproof case.
- Good heat dissipation conditions are beneficial to the product's lifetime. Please install the product in a suitable environment, and strictly prohibit using double-sided tape to attach the casing or circuit board.
- Please check the parameters of the LED driver to ensure they meet the application requirements of the lighting fixture.
- Please install according to the standard wire gauge specified in the manual to avoid malfunctions caused by inappropriate wiring.
- Before powering on, please ensure that the wiring is correct to prevent damage to the driver or lighting fixture caused by incorrect wiring.
- If a malfunction occurs, please do not attempt to repair it yourself; if you have any questions, please contact the manufacturer.
- The manual is for reference only. Please refer to the actual product. Any changes to this product will not be notified separately.
- For more information, please send an email to fei.l@jisim-tech.com.

Warranty Terms

- The product is warranted for 5 years. (The life and MTBF of the product are for reference only, and do not represent a warranty statement.)
- During the warranty period, if any quality issues arise, JISIM will provide free repair or replacement services.

Non-Warranty Terms

The following situations are not covered by the free warranty or replacement service:

- The warranty period has expired.
- Damage caused by human factors such as overvoltage, overload, or improper operation.
- Deformation or damage to the exterior appearance.
- Damage caused by natural disasters or other irresistible human factors.
- The warranty label has been torn off or removed.
- No contract or invoice proof is provided.



Notice:

1. Repair or replacement provided is the only remedy for customers. JISIM is not liable for any incidental or consequential damage unless it is within the law.
2. JISIM has the right to amend or adjust the terms of this warranty, and release in written form shall prevail.